

ISSN 2181-7200

ЎЗБЕКИСТОН РЕСПУБЛИКАСИ ОЛИЙ ВА ЎРТА
МАХСУС ТАЪЛИМ ВАЗИРЛИГИ

ФАРҒОНА ПОЛИТЕХНИКА ИНСТИТУТИ

И Л М И Й – Т Е Х Н И К А Ж У Р Н А Л И



2022. СПЕЦ. ВЫПУСК № 2

***НАУЧНО–ТЕХНИЧЕСКИЙ
ЖУРНАЛ ФерПИ***

***SCIENTIFIC –TECHNICAL
JOURNAL of FerPI***

ФАРҒОНА – 2022

CONTENTS

FUNDAMENTAL SCIENCES

Sulaymonov Kh.M., Tolaboyev D Kh Thermal conductivity of semiconductors	9
Tolaboyev D.X. One-dimensional chain of a simple diatomic crystal	13
Nasirov M.X. In dimensional quantitized structures simple zone approach	17

MECHANICS

Turdiyev H.E., Babayeva M.N. Investigate the probability of waste escaping from circular surface holes using the C ++ programming language	14
Yusupov S.M. Distribution of forces forced by front and side stamp plates	30
Fayzimatov B.N., Xusanov Y.Y. Analysis of technological possibilities of use of production resources when constructing operations for manufacturing parts on cnc machines	34
Yusupov S.M. Mathematical modeling of hill diagram for kaplan turbine	41

BUILDING

Umarov Sh.A., Mirzababaeva S.M. Research of deformations of reinforcement and concrete of bended beams with fiberglass reinforcement	51
Mirzaakhmedova U.A. Calculation of damaged load-bearing structures by strength indicators	56
Akhmedov J.J., Kosimova Sh.F. Reconstruction of historical city centers of Uzbekistan and architectural development of historical centers	62
Madraximov M.M., Abdulkhayev Z.E., Arifjanov A.M. Hydraulic calculation of groundwater level control through siphon drainage	69

ENERGETICS, THE ELECTRICAL ENGINEERING, ELECTRONIC DEVICES AND INFORMATION TECHNOLOGIES

Mamasadikov Yu., Alixonov E.J. Optoelectronic device for control of linear density of cotton tapes ...	76
Ismoilov I.K. Effect of liquid dielectrics on the efficiency of electrical devices	81
Okhunov M.H., Okhunov D.M. Analysis of the development of intelligent information systems and artificial intelligence technology in the digital economy	86
Abbasov Yo.S., Abdulkarimov B.A., Usmonov M.A. Research of heating equipment used in heat supply systems and optimization of operating parameters	92
Okhunov M.H., Okhunov D. M. Using machine learning and neural networks	96
Khudoyorov X.D. Development of a cathodic protection system for underground metal pipes using a photoelectric panel	101
Zokirov S.I., Rakhmatova G.M. Development of a PVT-converters using dichroic filters	106

CHEMICAL TECHNOLOGY AND ECOLOGY

Khoshimov A.A., Ibragimov F.A. Study of adhesive properties of complex fertilizers by processing ammonium nitrate granules with phosphorus-containing additives	111
---	-----

SOCIAL AND ECONOMIC SCIENCES

Ashurov M. S. Features of the development of the economy of Uzbekistan under the conditions of the medium term risk	116
Obidov J.G. Pedagogical forms, methods and tools for improving the knowledge of students of technical higher education institutions on the basics of the concept of technological determinism	120

SHORT MESSAGES

Sulaimonov Kh.M. Temperature dependence of film $(Bi_{0,3}Sb_{0,7})_2Te_3$ resistance at cyclic deformations	125
Abdullayev Sh.Sh. Utilization of renewable energy in the textile industry in Uzbekistan	128
Urokov A.Kh., Tashev D.V. Investigating the influence of traffic flow on the highways of the ferghana valley on the degree of traffic danger	131

МУНДАРИЖА

ФУНДАМЕНТАЛЬ ФАНЛАР

Sulaymonov X.M., Tolaboyev D.X. Yarimo'tkazgichlarning issiqlik o'tkazuvchanligi	9
Tolaboyev D.X. Ikki atomli oddiy uyachali kristallning bir o'lchamli zanjiri	13
Nasirov M.X. O'lchamli kvantlashgan strukturalarda oddiy zonali yaqinlashish	17

МЕХАНИКА

Turdiyev H.E., Babayeva M.N. Chiqindilarni aylana yuzali teshikchalardan chiqib ketish ehtimolliklarini C++ dasturlash tili yordamida tadqiq etish	14
Yusupov S.M. Old va yon tomon shtamp plastinalarining ta'sir etuvchi kuchlarning taqsimlanishi	30
Fayzimatov B.N., Xusanov Y.Y. Rdb dastgohlarda detallarni tayorlash operatsiyalarini ishlab chiqarish resurslaridan foydalanishning texnologik imkoniyatlarining tahlili	34
Yusupov S. M. Buriluvchi lopastli turbina xususiyatlarini matematik modellash	41

ҚУРИЛИШ

Умаров Ш.А., Мирзабабаева С.М. Шиша тола арматурали эгилувчи тўсиннинг арматура ва бетони деформацияларини тадқиқ этиш	51
Мирзаахмедова Ў.А. Шикастланган юк кўтарувчи конструкцияларни мустаҳкамлик кўрсаткичлари бўйича ҳисоблаш	56
Ahmedov J.J., Qosimova Sh.F. O'zbekiston tarixiy shahar markazlarini qayta tiklash va arxitekturaviy rivojlanishi	62
Мадрахимов М.М., Абдулхаев З.Э., Арифжанов А.М. Сифонли дренаж орқали ер ости сувлари сатҳини бошқаришнинг гидравлик ҳисоби	69

ЭНЕРГЕТИКА, ЭЛЕКТРОТЕХНИКА, ЭЛЕКТРОН ҚУРИЛМАЛАР ВА АХБОРОТ

ТЕХНОЛОГИЯЛАР

Mamasadikov Yu., Alixonov E.J. Paxta lentasining chiziqli zichligini nazorat qiluvchi optoelektron qurilma	76
Ismoilov I.K. Elektr qurilmalarning samaradorligiga suyuq dielektrlarning ta'siri	81
Охунов М.Х., Охунов Д.М. Рақамли иқтисодиётда ақлли ахборот тизимлари ва сунъий интеллект технологияларининг ривожланишини таҳлил қилиш	86
Abbasov Yo.S., Abduraimov B.A., Usmonov M.A. Issiqlik taminoti tizimlarida qo'llaniladigan isitish jihozlarini tadqiq etish va ishchi parametrlarini optimallashtirish	92
Охунов М.Х., Охунов Д.М. Машинани ўрганиш ва нейрон тармоқларидан фойдаланиш	96
Khudoyorov X.D. Fotovoltaik paneldan foydalangan yer osti metall quvurlarining katodik himoya tizimini ishlab chiqish	101
Зокиров С.И., Рахматова Г.М. Дихроик филтрлардан фойдаланган ҳолда РVТ-ўзгартиргичларни яратиш	106

КИМЁВИЙ ТЕХНОЛОГИЯ ВА ЭКОЛОГИЯ

Хошимов А.А., Ибрагимов Ф.А. Аммиакли селитра гранулаларини фосфортутган қўшимчалар билан қайта ишлаш орқали мураккаб ўғитларнинг адгезион хусусиятларини ўрганиш	111
---	-----

ИЖТИМОЙ-ИҚТИСОДИЙ ФАНЛАР

Ashurov M.S. O'rta muddatli risk muhitida o'zbekiston iqtisodiyotini rivojlantirish xususiyatlari	116
Obidov J.G'. Texnika oliy ta'lim muassasalari talabalarida texnologik determinizm konsepsiyasi asoslariga doir bilimlarini takomillashtirishning pedagogik shakli, metodi va vositalari	120

ҚИСҚА ХАБАРЛАР

Sulaymonov X.M. Siklik deformatsiyalarda $(Bi_{0,3}Sb_{0,7})_2Te_3$ plyonka qarshiligining haroratga bog'liligi	125
Abdullaev Sh.Sh. O'zbekiston to'qmachilik sanoatida qayta tiklanuvchi energiyadan foydalanish	128
Уроков А.Х., Ташев Д.В. Фарғона водийси автомобиль йўларидаги транспорт оқим харакатнинг хавфлилик даражасига таъсирини тадқиқ қилиш	131

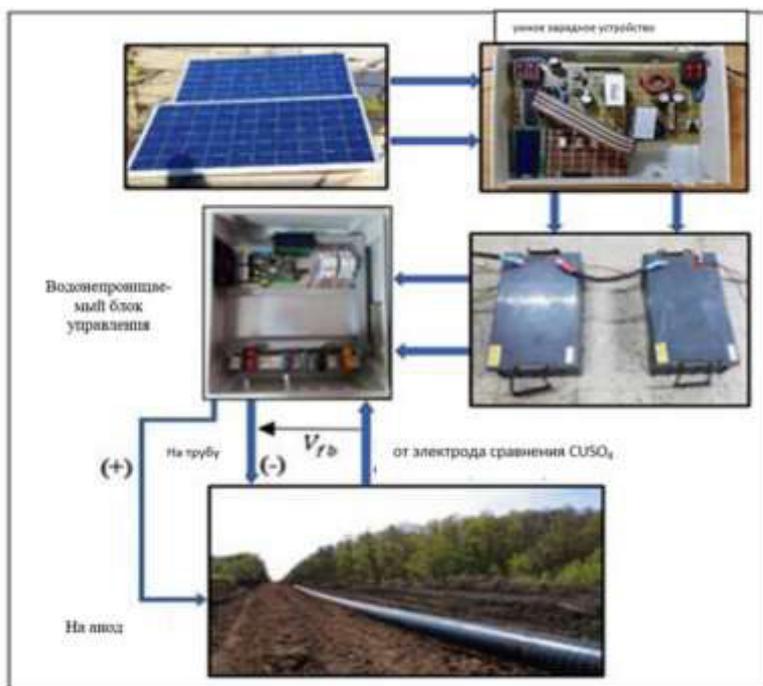


Рис.5. Предлагаемые части солнечной КЗ станции.

Основной вывод данной работы можно пояснить в следующих моментах: во-первых, из-за гибкости в выборе положения анода, обеспечивающего наилучшее покрытие защиты, необходимо использовать солнечную систему КЗ, чтобы не использовать традиционные источники электроэнергии. Во-вторых, разработанный преобразователь выполняет непрерывное изменение приложенного анодного напряжения к катодному в соответствии с обратной связью (электрода сравнения $Cu-CuSO_4$). Наконец, общая стоимость солнечной

системы КЗ ниже, чем у традиционной системы КЗ в КПК. Солнечной системе КЗ требуется всего 4 анода вместо 20 анодов в традиционной системе КЗ.

Список литературы

- [1]. Saif aldeen H. Mohammed, and Isam M. Abdulbaqi, "Numerical Study and Design of an Impressed Current Cathodic Protection System for Buried Metallic Pipes", *Third Scientific Conference of Electrical Engineering (SCEE), IEEE*, pp. 95-100, 2018.
- [2]. MESA Products, "Shallow Horizontal Continuous Ground Bed Design", *C. P. Design center by MESA products, Inc*, www.mesaproducts.com, 2001.
- [3]. Zaki Ahmad. "Principles of corrosion engineering and corrosion control", Elsevier Science & Technology Books, 2006.
- [4]. Агиней Р.В., Никулин С.А., Александров Ю.В.: Электрохимическая защита нефтегазопроводов, Издательство: Инфра-Инженерия, 2020 г.
- [5]. Ткаченко В.Н. Электрохимическая защита трубопроводных сетей, М.: Стройиздат, 2004. - 320 с.
- [6]. Конев А.В. и др. Противокоррозионная защита магистральных трубопроводов и промышленных объектов, Тюмень: ТюмГНГУ, 2003. – 211 с.
- [7]. Коррозия территории нефтегаз. Все о защите материалов и поверхностей №3(23), 2012 г, 91 стр.

DEVELOPMENT OF A PVT-CONVERTERS USING DICHROIC FILTERS

¹S.I. Zokirov, ²G.M. Rakhmatova

¹Fergana Polytechnic Institute, ²Fergana branch of TUIT named after Muhammad al-Khorezmi
(Received June 13, 2022)

The article discusses the theoretical foundations of the dichroism effect and the possibility of using dichroic filters in the development of solar installations for the conversion of electrical energy. A schematic diagram of a hybrid solar plant with photocells with different bandgaps, thermoelements and dichroic filters is presented.

Keywords: PVT converters, hybrid solar system, solar spectrum, dichroic filter

В статье рассматриваются теоретические основы эффекта дихроизма и возможность использования дихроичных фильтров при разработке солнечных установок для преобразования

электрической энергии. Представлена принципиальная схема гибридной солнечной установки с фотоэлементами с разной шириной запрещенной зоны, термоэлементами и дихроичными фильтрами.

Ключевые слова: PVT-преобразователи, гибридная солнечная установка, солнечный спектр, дихроичный фильтр

Мақолада дихроизм ҳодисасининг назарий асослари ва электр энергия ишлаб чиқарувчи қуёш қурилмаларини яратишда дихроик филтрлардан фойдаланиш имкониятлари кўриб чиқилган. Турли кенгликдаги таъқиқланган зонага эга қуёш элементлари, термозэлементлар ва дихроик филтрлардан иборат гибрид қуёш қурилмасининг принципал схемаси тақдим этилган.

Ключевые слова: PVT-ўзгартиргич, гибрид қуёш қурилмаси, қуёш спектри, дихроик фильтр

Introduction

Today, the term "hybrid solar plant" means a power plant, which is a high-tech solution that allows complete energy independence around the clock. In fact, this installation is a networked and autonomous station, combined into a single complex. Such an installation is structurally not significantly different from other types of systems. It also includes solar panels, a metal structure for their installation, inverters, automation and protective devices. You will also need batteries, as in an autonomous station. The difference is that this kit uses a different type of inverter specially designed for hybrid generation. Although such installations ensure the production of energy, its conservation and the ability to use it at the right time as needed, the ability to use electricity from the network, if own production is not enough on certain days, and on other days, they do not take into account the influence of negative factors in the conversion of solar energy. One of these factors is overheating of solar panels.

Related works

In recent years, research has been actively carried out to eliminate temperature factors that negatively affect the efficiency of photocells. For this purpose, mainly two and three-stage solar modules with high efficiency in a wide range of operating temperatures are being developed [1]. In addition, a great deal of work is underway to create highly efficient designs for "Photothermoelements" proposed by Sominsky [2]. In this area, one of the first researchers who conducted practical experiments was BV Tarnievsky [3]. However, according to the researcher, the results of the work are not very satisfactory. This is due to the fact that as the light intensity increases, the temperature of the photoelectric converter also rises, and the efficiency drops so quickly that an increase in the characteristics of thermoelements cannot compensate for this drop in performance.

As noted by E.K. Iordanishvili [4], there are two conceptual difficulties on the way of further development of this direction. The first difficulty is that the part of the solar spectrum that cannot be converted into electricity, especially in the presence of a concentrator, overheats the photoconverter. And this leads, despite the active heat removal, to a decrease in the efficiency of photoconversion due to thermal degradation of the photocell. The second difficulty lies in the fact that the heat flux coming from the chamber is not enough to create temperature differences at the thermoelement junctions, to achieve high values of thermoelectric efficiency. Taking into account the fact that the efficiency drops very noticeably when the photostructures are heated to 100-150 degrees, the real total efficiency of the photothermogenerator only slightly exceeds the efficiency of individual photocells.

As an alternative solution to the problem, the author proposed passing the light flux from a source, including from a concentrator, through a narrow-band light filter that cuts off the entire part of the spectrum that is not converted into electricity, and directs only that part that is optimally perceived by the photocell as the photosensitive surface of the photostructure. The rest of the luminous flux, actively heating the filter, is directed through the high-temperature "bridge" to the hot junction of the Seebeck thermoelement, where a heat flux is formed sufficient to create an optimal temperature difference between the junctions of the thermoelectric structure branches. But

even in this version of the solution there are nuances that must be taken into account: when heat is transferred through the so-called "bridge", there is a loss of thermal energy.

And in the works of Uzbek researchers, can also find works devoted to the development of devices of this type. In this direction, researchers from the school of Professor A.M.Kasimakhunova are achieving significant results. In particular, they have done significant work to create a highly efficient photothermogenerator of selective radiation for using the installation in real conditions [5, 6, 7].

Theoretical foundations.

It is known that in optical physics there is the term dichroism, which refers to the absorption transmission of light by anisotropic substances at different levels depending on its polarity and wavelength. This phenomenon was first discovered in 1809 by P.Kore in minerals and in 1816 by J.B. Bio and the German physicist T.I. Seebeck in tourmaline crystals. The diagram of the phenomenon of dichroism arising in them is shown in Figure 1.

In a schematic study of the process, two monochromatic beams were conventionally used as incident light. In this case, rays emanating from a medium with a relatively dark color, a refractive index n_1 , are directed into a second medium with a refractive index n_2 and a lower density. As can be seen from the figure, the red rays fall at the angle $\phi_1 < \alpha_c = \theta_c$, i.e. at the interface of two media, they are partially refracted at an angle ϕ_2 and partially reflected. Green light falls at an angle $\theta > \alpha_c = \theta_c$ and is fully reflected. By correctly choosing the stoichiometric composition and physical properties of the secondary medium, it is also possible to achieve a relatively lower or fully refraction of red light. This makes it possible to transmit beams with a wavelength of a certain range and reflect the rest.

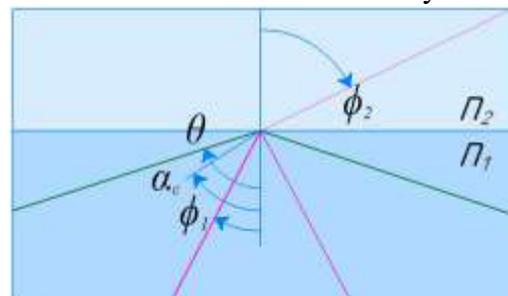


Figure 1. Schematic representation of the phenomenon of dichroism.

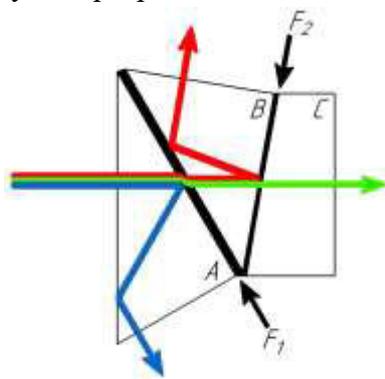


Figure 2. A trichroic prism assembly [8].

Using dichroic mirrors and filters, it is possible to design a dichroic prism (Figure 2), that is, devices that separate the incident light into several streams with wavelengths in a certain range. Such devices typically include one or more glass prisms with a dichroic optical coating that absorbs and / or reflects light depending on the wavelength.

In Figure 2 shows the principle of operation of the device, in which the light rays falling on the prism A are split into rays with different wavelengths at the output and propagate in different directions. In this case, for example, the "blue" rays B are completely reflected from the filter surface and directed towards the lower surface of the prism. But, due to the fact that this filter is optically transparent to the relatively low frequency G- and R-beams, they are passed through. They are splits into two more as a result of hitting the second filter F2: red light is reflected, and green light is transmitted.

Based on this optical property of dichroic prisms, based on the scheme proposed by Professor A.M.Kasimakhunova, it is possible to construct a device that uses selective beams, divided into two parts for directing to the surface of the photo and thermoelements located separately from each other. But in this case, there are a number of disadvantages and difficulties:

- To maintain the optimal temperature of the solar cells (cold junctions of the thermoelements legs and the photocell) that make up the photothermogenerator, needs using separated each other cooling systems;

- To prevent non-photoactive rays from reaching the surface, the photocell must be placed in a shell that protects it from the external environment;
- The exact direction of the split beams perpendicular to the surface of the solar cells requires complex physical and technical calculations;

The wavelength range of the photoactive rays is not always optimal for the selected photocell sample. This is due to the fact that the spectral sensitivity of each sample of a photocell of the same type changes depending on the physical and technological properties of the semiconductor material. This requires redefining the optimal spectral content for each sample. Otherwise, the efficiency of the selected sample may not be as expected as a result of using not all the photocell potential due to overheating under the influence of non-photoactive rays on the sample surface or, conversely, due to narrowing of the spectra for a sample with a relatively wide range of photosensitivity.

Structure of the device.

In order to positively solve the above problems, which negatively affect the technical, economic and energy efficiency of the device, a design of a new model of photothermal generator was developed, based on the diagram shown below in Figure 3.

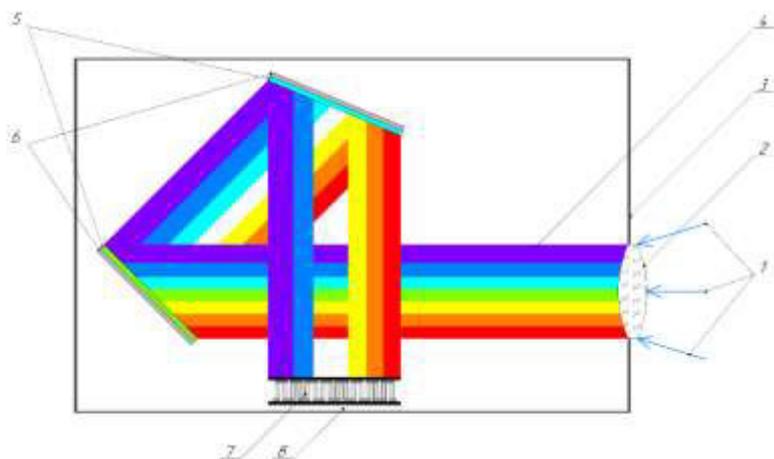


Figure 3. Schematic diagram of a multi-photo element PVT-cinverter using dichroic filters.

1-sunlight, 2- collimation system, 3- protective block, 4- parallel rays, 5-photocells, 6- dichroic filters Figure 2. A trichroic prism assembly [8].

As can be seen from the figure, sunlight 1, collected by the concentrator, with the help of the collimation system 2 is introduced into the protective block 3 in the form of parallel rays 4. The incoming light flux is completely directed to the surface of the first photocell 5. But the rays do not hit directly on the surface of the photocell. This is due to the fact that the dichroic filter 6, located on its surface and transmitting photoactive rays for this photocell, reflects all rays, except for spectra with a wavelength corresponding to a certain interval. As a result, only

photoactive rays fall on the surface of the photocell for a given sample, and almost all of them contribute to the formation of a photocurrent. This in turn keeps the cell temperature low. The reflected light using the first dichroic filter is directed to the second photocell, which differs in spectral sensitivity from the first sample. The process of refraction and reflection of light is exactly the same for the second filter and photocell. All light energy, with the exception of those transmitted by the filters, is absorbed by the receiving surfaces of the thermocouple 7, and electricity is additionally generated. It is necessary to achieve their complete absorption by the thermocouple so that the rays directed to the thermocouple do not negatively affect the efficiency of the photocells when reflected from its surface. For this, the receiving surface is covered with a black layer. The cold end 8 of the thermocouple is cooled using streams of cold air or liquid (water).

An ideal photocell would be capable of converting all incident photons into electrical energy and would have perfectly linear characteristics depending on the light intensity, since the amount of current generated would be directly proportional to the number of photons falling into the photocell. But the spectral sensitivity of a real photocell is limited to a rather small region of the spectrum. For example, the spectral sensitivity of a silicon photocell is observed in the UV and visible regions of the spectrum. But they are insensitive above 1100 nm, while germanium photocells are insensitive

to UV light, but can be effective at longer wavelengths up to 1800 nm. Photocells based on compounds such as InGaAs are also sensitive at longer wavelengths and are more efficient than germanium photocells. But at the same time they are inferior in terms of technical and economic indicators in production.

Based on the foregoing, the correct choice and location of photovoltaic cells in the device is one of the most important technical and physical aspects for the optimal conversion of solar energy, mainly with the help of photovoltaic cells. Since selective light transmission allows parasitic temperatures to be dissipated and thereby allows the potential of the photocells to be used as consistently as possible, improper sampling of dichroic filters or improper placement of photocells will result in lower output values than the optimum expected.

Conclusion.

Suboptimal separation of light beams for the photocell results in more light energy going to the thermocouple, which in turn causes the thermocouple to generate more electricity. But the increase in electrical energy produced by thermocouples cannot compensate for the energy losses that could be obtained from a photocell with an optimal design of the device. Because even the most efficient thermoelement with its low efficiency cannot produce more than 6-7% electricity. Because this value is the limit for thermoelements at full direction of light energies. Therefore, the overall efficiency of the photothermal generator is determined by the maximum using of the photoelectric conversion capability.

References

- [1]. V.M.Andreev, N.Yu.Davidyuk, V.S. Kalinovskiy, N.A.Sadchikov, A.V. Chekalin, M.Z. Schwartz. «Concentrator solar modules with high efficiency in a wide range of operating temperatures». *Renewable Energy XXI Century: Energy and Economic Efficiency*, pp. 91-96, 2016.
- [2]. M. Sominskiy. «Photothermoelement». Russia. Patent SU 173341 A1, 1965.
- [3]. N. Lidorenko, F.Kh. Nabiulin, V.V. Tarnizhevskiy. «Designs of solar power plants with photovoltaic converters». *Solar technology*, no. 2, p. 20, 1966.
- [4]. E. Iordanishvili. «" Phototherm "- a new concept». Letters to ZhTF, T. 32, No. 24, pp. 75-78, 2006.
- [5]. A.M. Kasimakhunova, S. I. Zokirov, M. A. Norbutaev. «Development and Study of a New Model of Photothermogenerator of a Selective Radiation with a Removable Slit». IJARSET, 8981-8984. 2019.
- [6]. L.K. Mamadilieva, S. I. Zokirov. «Automation problems of finding the optimal coordinates of a photocell in a selective radiation photothermogenerator». IJARSET, Vol. 6, Issue 9, Sep 2019.
- [7]. S.I. Zokirov, M. N. Sobirov, H. K. Tursunov, M. M. Sobirov. «Development of a hybrid model of a thermophotogenerator and an empirical analysis of the dependence of the efficiency of a photocell on temperature». Journal of Tashkent Institute of Railway Engineers, 2019, 15 (3), 49-57.
- [8]. Wikipedia contributors, «Dichroic prism» 2020. [Online]. Available: https://en.wikipedia.org/w/index.php?title=Dichroic_prism&oldid=941041243. [Date of treatment: 15 03 2021].